

Flow control valves

NAMUR


Technical details

Connection	Namur
Nominal size	5 mm
Flow rate	KN-063: 210 NI/min, KN-065: 290 NI/min
Weight	0.170 kg
Temperature range	-25°C ... +70°C
Medium	Filtered, oil-free and dried compressed air according to ISO 8573-1:2010, Class 7:2:4, instrument air, free of aggressive additives. Alternatively the pressure dew point must be at least 10°C below lowest occurring ambient temperature.
Materials	Body: Al (anodized) seals: NBR inner parts: brass
	Valves in accordance with 2014/34/EU (ATEX) available. (Chapter 13)




Flow control valves for speed regulation of pneumatically operated actuators. Mounting between NAMUR valve and actuator. Adjustable with screwdriver or manually. The location pin, screws and seals are included.

3/2-way




KN-063-DRS
for 3/2-way valves,
adjustable with screwdriver




KN-063-DRH
for 3/2-way valves,
manually adjustable

5/2- and 5/3-way




KN-065-DRS
for 5/2-way- and 5/3-way valves,
adjustable with screwdriver




KN-065-DRH
for 5/2-way- and 5/3-way valves,
manually adjustable

Dimensions


KN-063-DRS

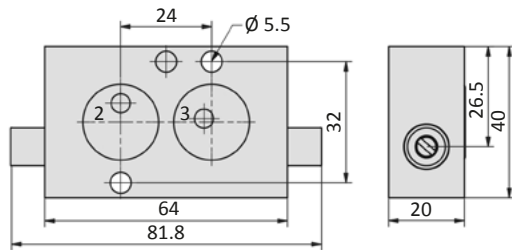

KN-065-DRS

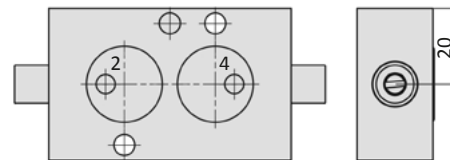

KN-063-DRH

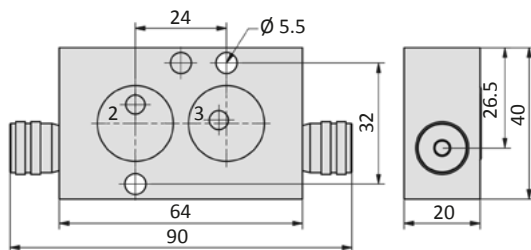

KN-065-DRH

